

加热管电阻箱 (JRA)

Heating pipe Resistor Assemblies


■ 产品概述 (Product Introduction)

JRA 加热管电阻箱的绕线电阻器采用不锈钢管外包，外形美观，该电阻具有耐气候性、耐振动、散热快，防护等级高等特点，安全性优于传统瓷骨架电阻器。该电阻器是用一种耐高温的有机硅树脂和硅粉作基本材料封装的功率型绕线电阻。易紧密安装，易附加散热器。做为制动电阻保护变频器、伺服等不受电机再生电能的危害，电力电子负载测试中做为阻性负载。

The wire-wound resistor of the resistance box of the JRA heating pipe adopts stainless steel pipe as the wrap which has a good looking appearance. The resistor has the characteristics of weather resistance, vibration resistance, fast heat dissipation, high level of protection, etc. Its security is superior to traditional resistors of porcelain skeleton. The resistor is a power type wirewound resistor packaged with the basic materials of high temperature-resistant silicone resin and silica fume. Easy to install tightly and easy to attach heat sink. Usable as a braking resistor to protect the inverters, servos, etc., from damage by regenerative energy of the motor, and as a resistive load in power electronic load tests.

功率范围(RA Power range):1KW-12KW

■ 产品尺寸图 (Product Size)

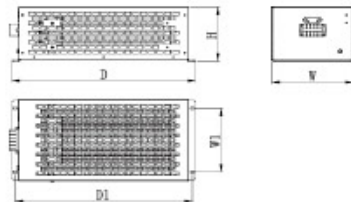

规格 Type	功率(KW) Power	尺寸Dimension (±1mm)					安装孔 Mounting holes
		D	D1	W	W1	H	
JRA	2	575	555	255	200	170	7*14
JRA	4	575	555	255	200	170	7*14
JRA	6	575	555	255	200	170	7*14
JRA	8	575	555	255	200	260	7*14
JRA	10	575	555	255	200	260	7*14
JRA	12	575	555	255	200	260	7*14

备注：其他规格尺寸，可根据用户要求制造。
Remark: Dimension can be customization

■ 成品识别码 (Product Identification Code)

JRA	-	1000W	-	40R	-	J
加热管电阻箱 Heating pipe Resistor Assemblies		额定功率 Rated Power		电阻阻值 Resistance Value		阻值误差 Resistance Tolerance H=±3% J=±5% K=±10%



典型电路图

